

BIFACIAL MODULE WITH DUAL GLASS

WS9-700~720NBG-E1


N-Type /Positive power tolerance of 0~+3%/Max module efficiency 23.18%

- Suitable for ground power plants and distributed projects
- Advanced module technology delivers superior module efficiency
 - Non destructive cutting · MBB half-cut
- Excellent power generation performance
 - Excellent IAM and Weak light response · Low temperature ratings
 - 0.40% linear Power decline
- High module quality ensures long-term reliability
 - Strict selected material · Advanced technology · Leading standard
- Enhanced Mechanical Load
 - Mechanical performance up to 5400pa positive load and 2400pa negative load



Complete System and IEC Product Certification

IEC 61215(2016), IEC 61730(2016) ISO9001:
2015: Quality Management System ISO14001:
2015: Environment Management System
ISO45001:2018: Occupational Health
and Safety Management System

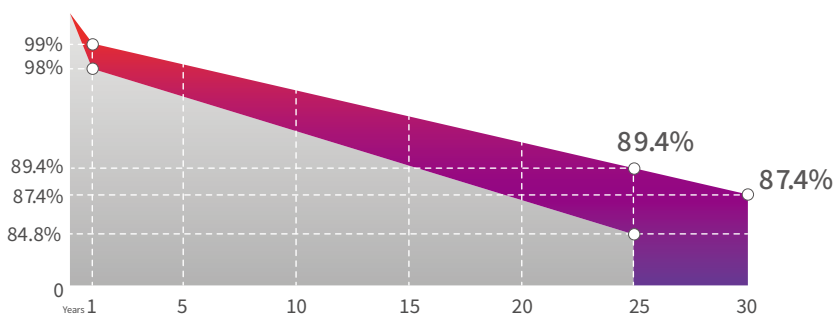

30-Year excess linear power output warranty

BLOOMBERG
TIER 1
Global
Leading Brand



*The data in this table is for reference only, and is subject to actual delivery.